



Description:

- Frequency range: DC – 18 GHz
- VSWR max: 1.15
- Insertion resistance min: 5000MΩ
- Inner conductor: Au plated beryllium Copper
- Outer conductor: PASS stainless
- Insulator: PEI
- Operating Temperature: -45 to +85 °C

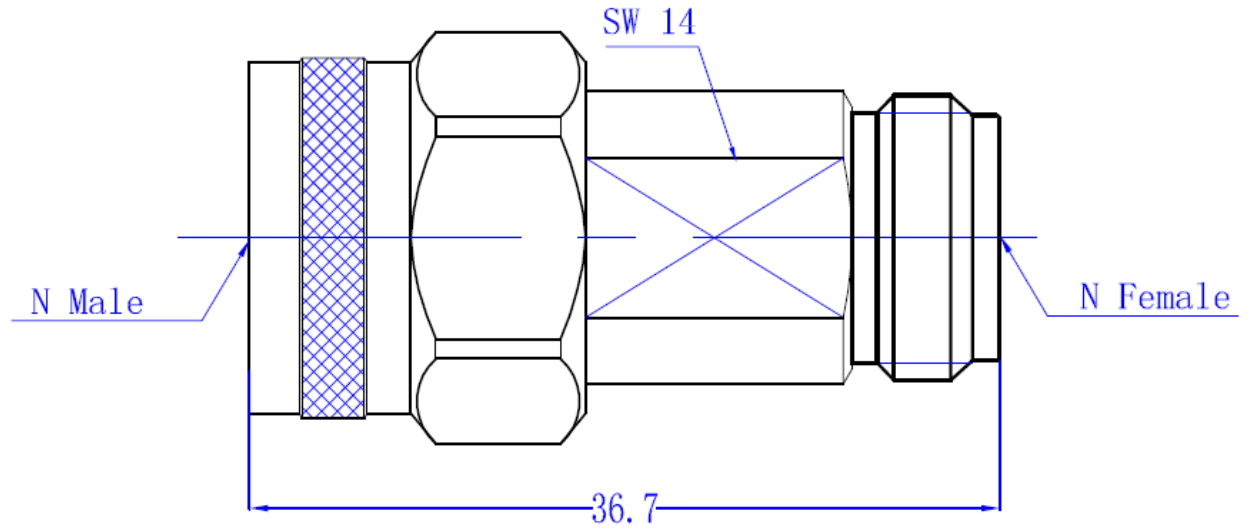

All DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED	SIZE A	SCALE NO	 RF Interconnect Solutions San Jose, CA 95131 Tel: 408-943-8266, E-mail: sales@evissap.com Web: www.evissap.com
	REV. A	SHEET 1/1	
CAGE CODE: 4K GK3	Title: 2322-133-001H		Title: 18GHz Test Grade N male to N female adapter