



**Description:**

- Frequency range: DC – 40 GHz
- VSWR max: 1.15 : 1
- Insertion loss max:0.4 dB
- Insulation resistance min: 5000MΩ
- Inner conductor: Au plated Beryllium Copper
- Outer conductor: PASS stainless
- Insulator: PEI
- Operating Temperature: -55 to +85 °C

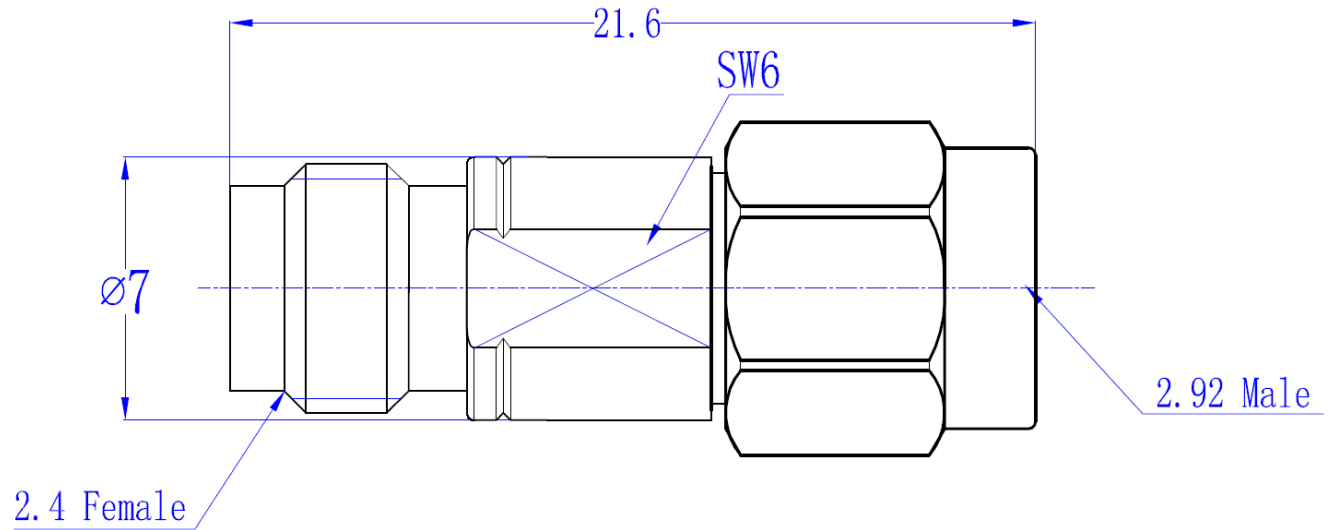

All DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED	SIZE A	SCALE NO	 RF Interconnect Solutions San Jose, CA 95131 Tel: 408-943-8266, E-mail: <a href="mailto:sales@evissap.com">sales@evissap.com</a> Web: <a href="http://www.evissap.com">www.evissap.com</a>
	REV. A	SHEET 1/1	
CAGE CODE: 4K GK3	Title: G3N2-133-001H		Title: Test Grade 2.92 male to 2.4 female adapter