


Standard length tolerance	
L (inches)	Tolerance (inches)
2.0 - 5.9	+/-0.125
6.0 - 11.9	+/-0.187
12.0 - 23.9	+/-0.250
24.0 - 35.9	+/-0.313
36.0 - 47.9	+/-0.375
48.0 - 59.9	+/-0.500
60.0 - 71.9	+/-0.563
72.0 - 83.9	+/-0.625
>83.9	Please contact evissap

Description:



- Frequency range: DC – 20.0 GHz
- VSWR typically $\leq 1.35:1$ @ 20.0 GHz
- Raw cable insertion loss: ~ 1.65 dB / ft @ 20.0 GHz
 - S11 & S21 plot on page 2

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED	SIZE A	SCALE NO	
	REV. A	SHEET 1/1	
CAGE CODE: 4KGK3	Title: eP6109R		Title: SMA Female to SMA Female 047 semi-rigid cable

Contact us:
E-mail: sales@evissap.com

Marker 2 25.837750000 GHz


Print

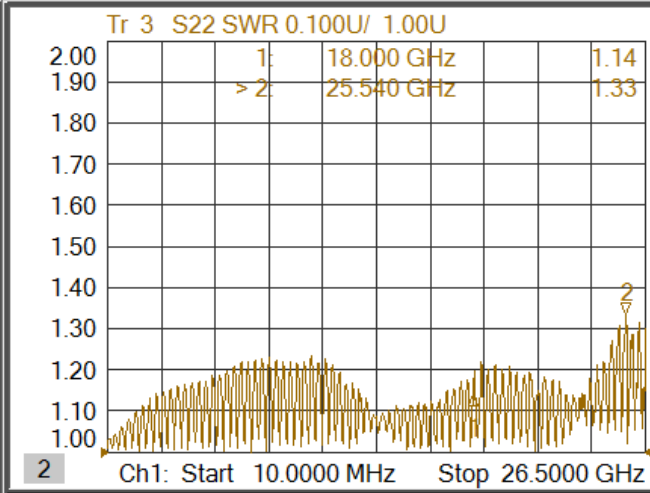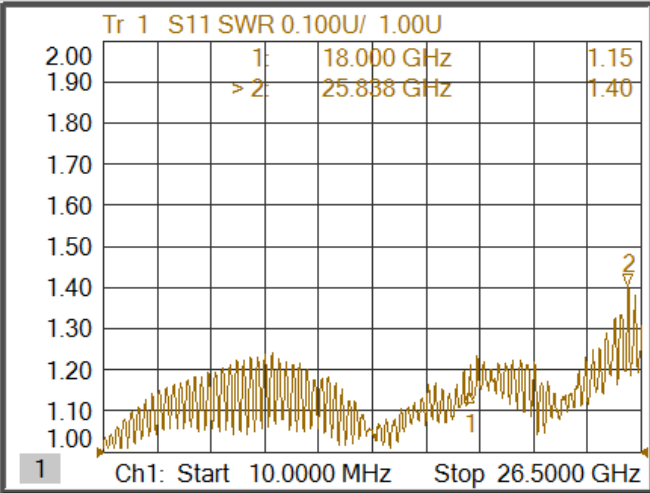

Print...

Page Setup...

Print to File...

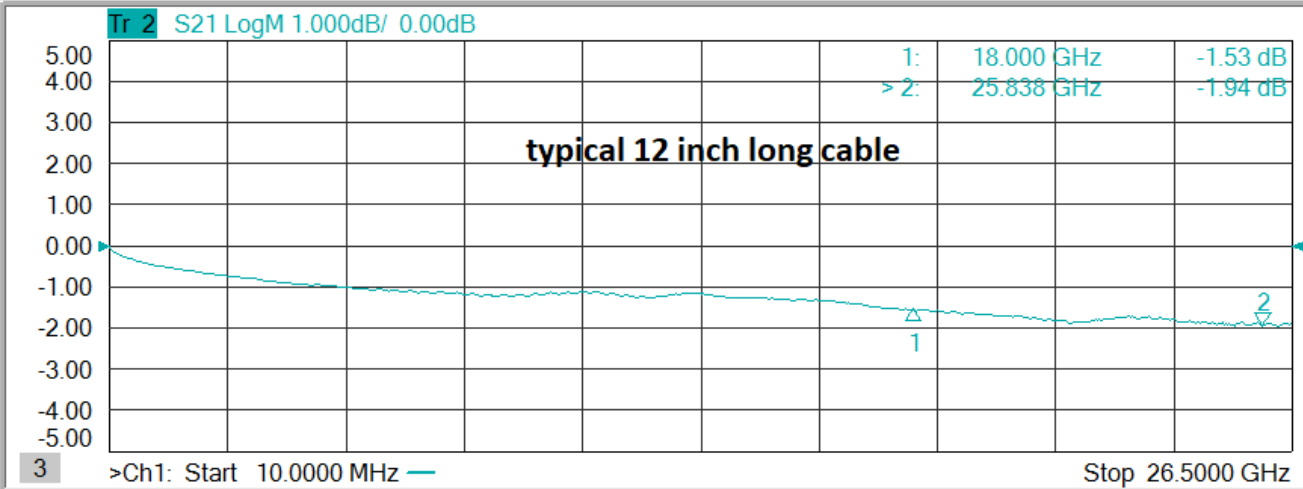

Print Colors...