


Standard length tolerance	
L (inches)	Tolerance (inches)
2.0 - 5.9	+/-0.125
6.0 - 11.9	+/-0.187
12.0 - 23.9	+/-0.250
24.0 - 35.9	+/-0.313
36.0 - 47.9	+/-0.375
48.0 - 59.9	+/-0.500
60.0 - 71.9	+/-0.563
72.0 - 83.9	+/-0.625
>83.9	Please contact evissap

Description:

- Frequency range: DC – 26.5 GHz
- VSWR typically $\leq 1.35:1$
- Raw cable insertion loss: 0.9 dB / ft @ 26.5 GHz
 - VSWR and Insertion loss plot on page 2


All DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED	SIZE A	SCALE NO	
	REV. A	SHEET 1/1	
CAGE CODE: 4KGK3	Title: eP7019R26		Title: SMA Male to SMA Male, 0.141" Flexible

Contact us:
E-mail: sales@evissap.com


Scale Per Division 1.100 dB

Print


Tr 1 S11 SWR 0.100U/ 1.00U

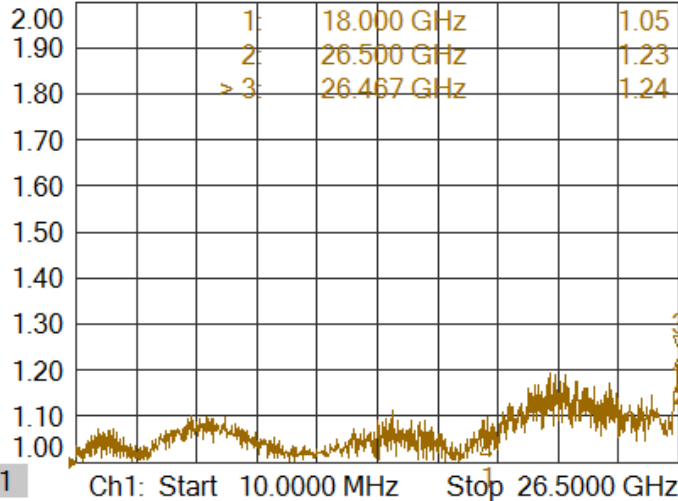

Tr 3 S22 SWR 0.100U/ 1.00U

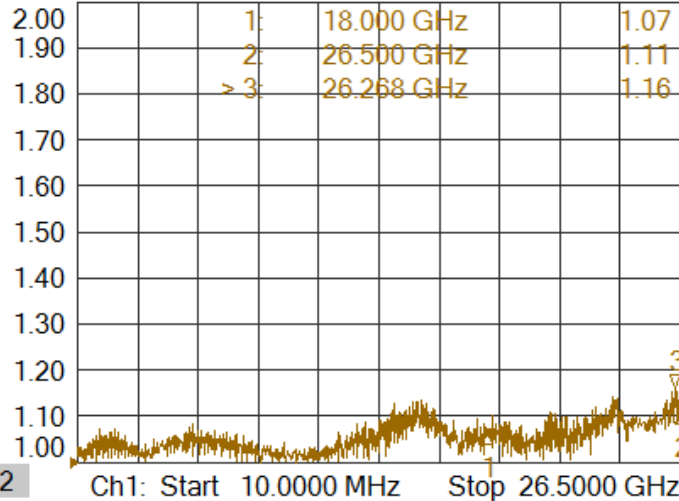

Tr 2 S21 LogM 1.100dB/ 0.00dB

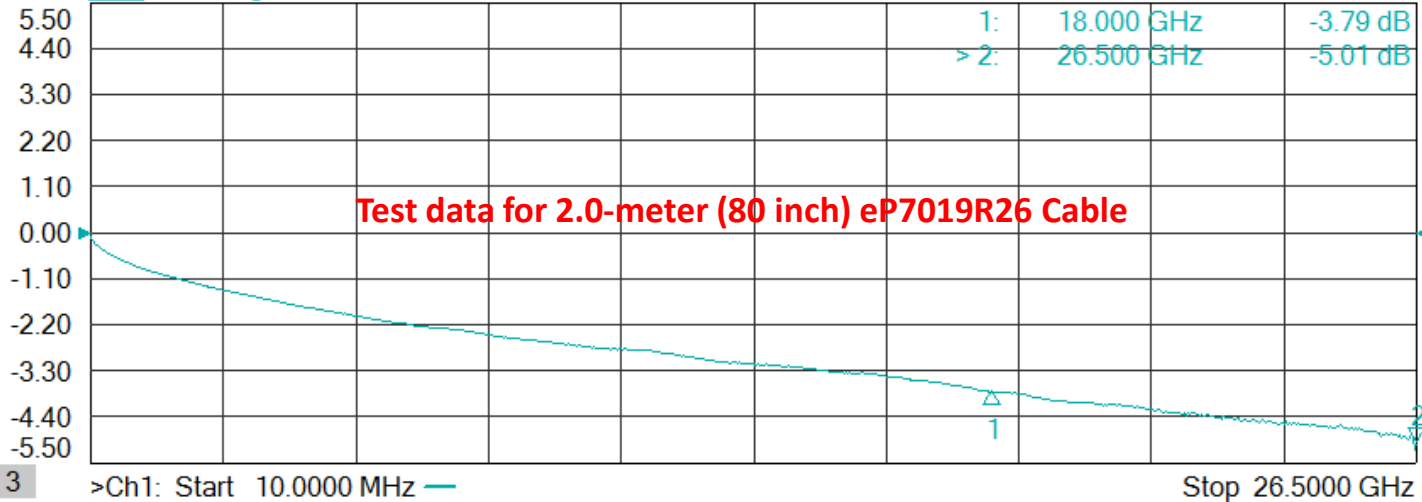

Print...

Page Setup...

Print to File...

Print Colors...