


2.4mm Male

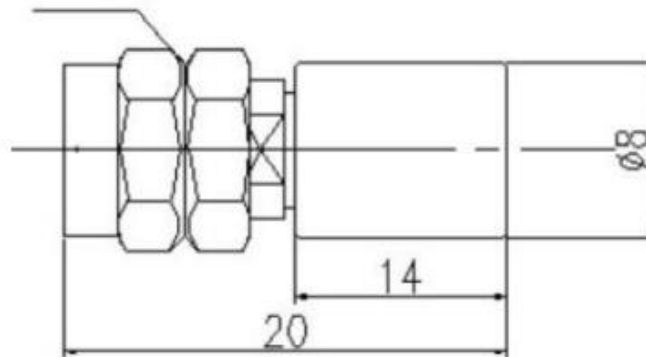

Notes:

- Frequency range: DC – 50 GHz
- VSWR < 1.40:1 from DC through 50 GHz
- Power handling = 2.0 Watt
- Impedance: 50 Ohms
- Operating temp: -55°C to 125 °C
- Inner conductor: Gold plated beryllium copper
- Outer body: Passivated stainless steel

All DIMENSIONS ARE IN MM UNLESS
OTHERWISE SPECIFIED

SIZE
A

SCALE
NO

REV.
A

SHEET
1/1

evissap
RF Interconnect Solutions

CAGE CODE: 4KGK3

ePCN-A2404-2.0W

Title:
2.4mm Male Terminator, 50 GHz, 2.0 Watt

Contact us:

E-mail: sales@evissap.com