
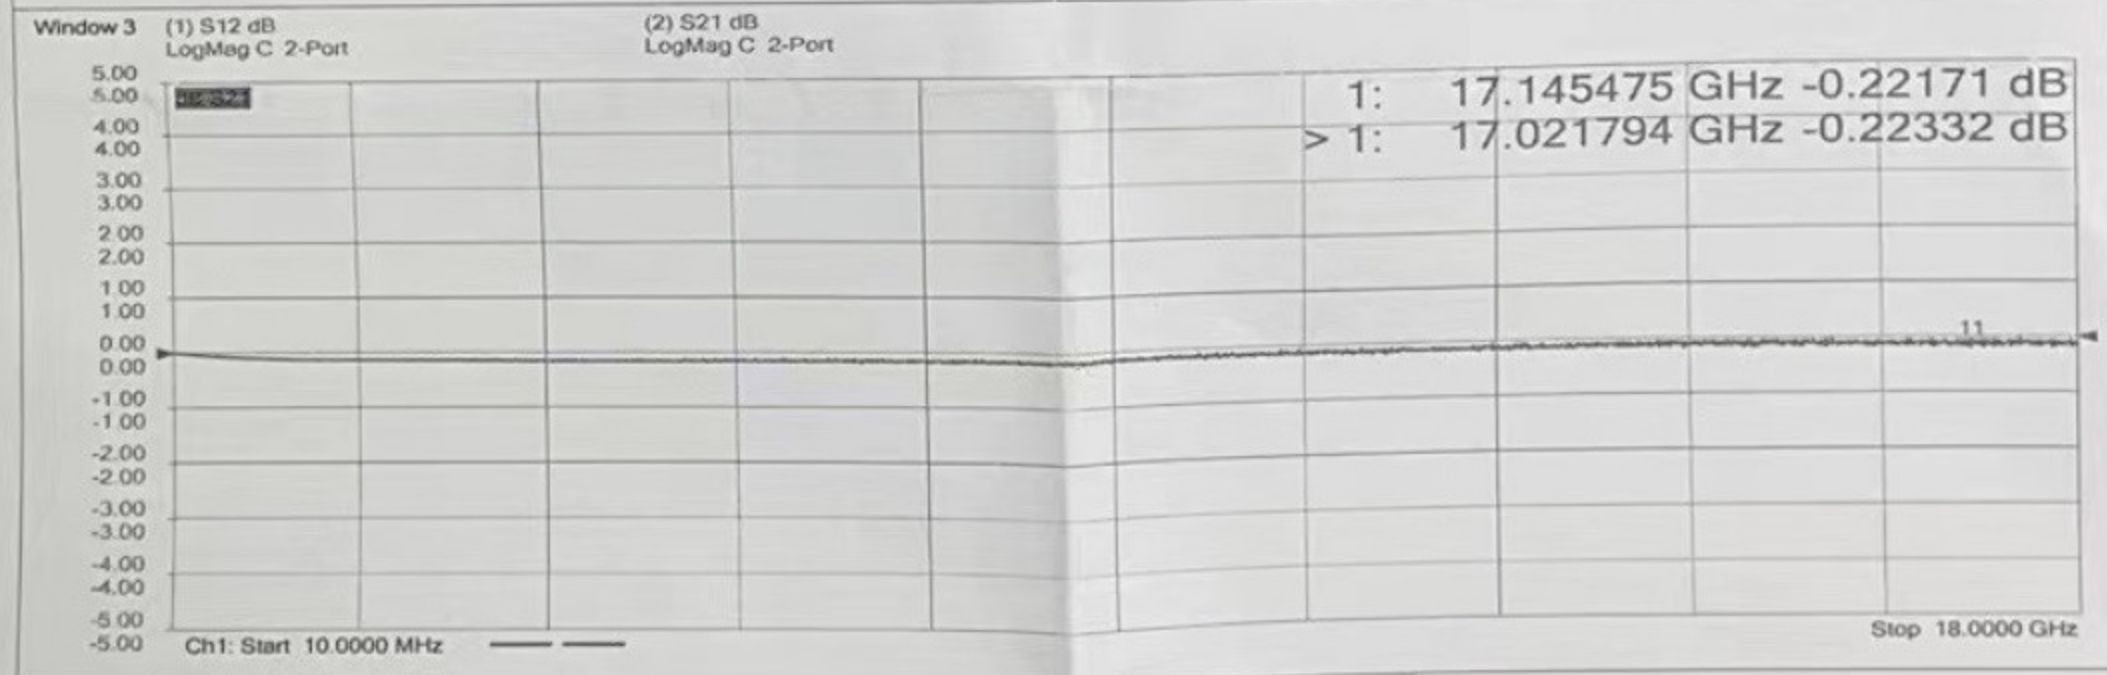
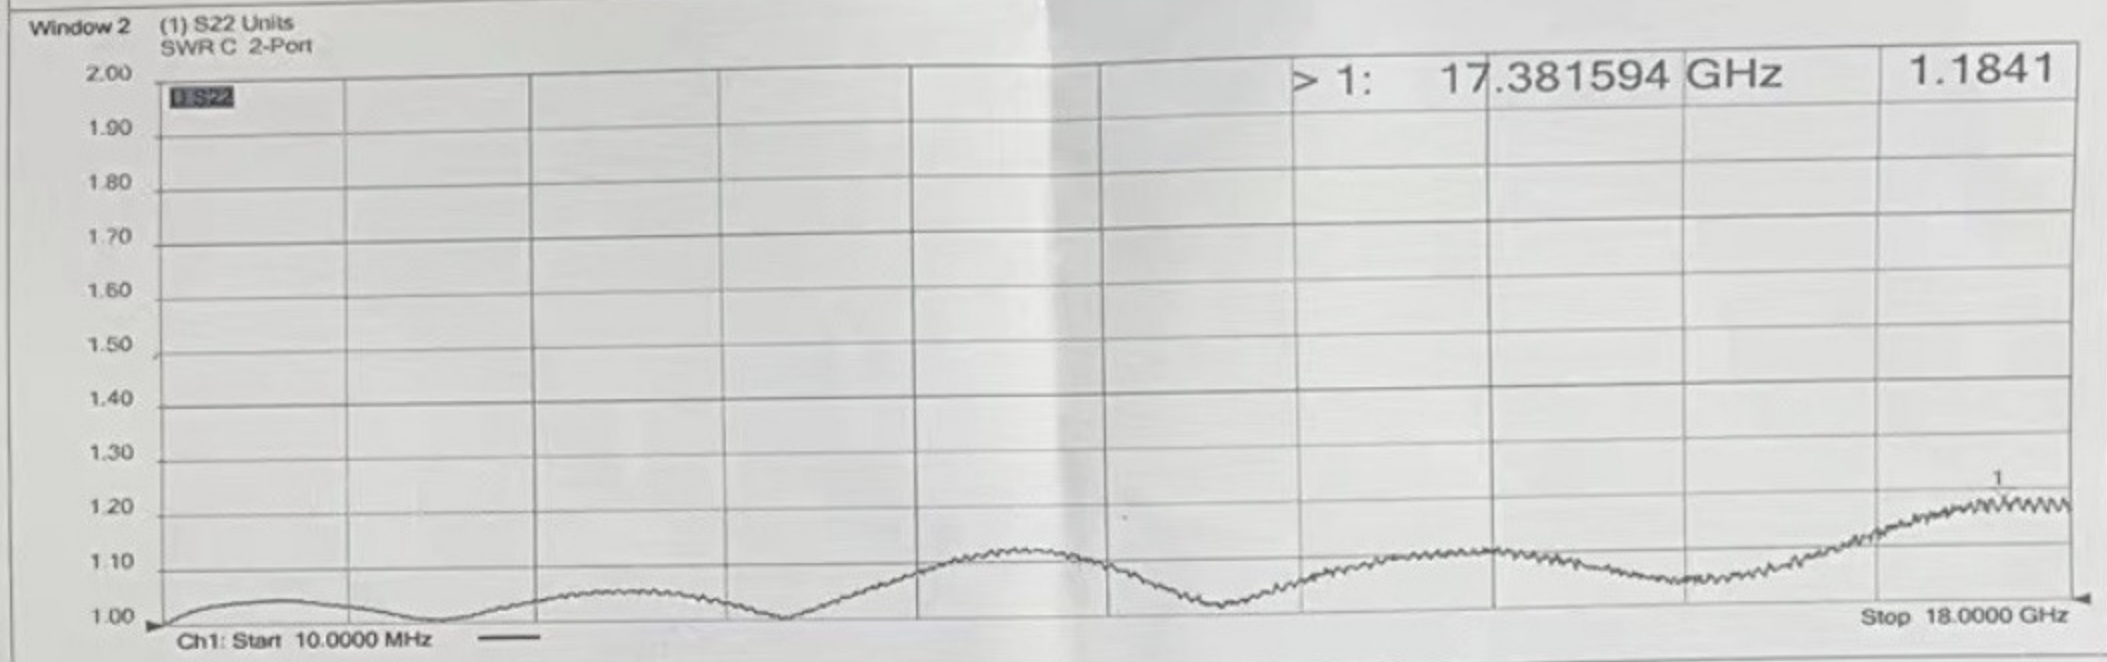
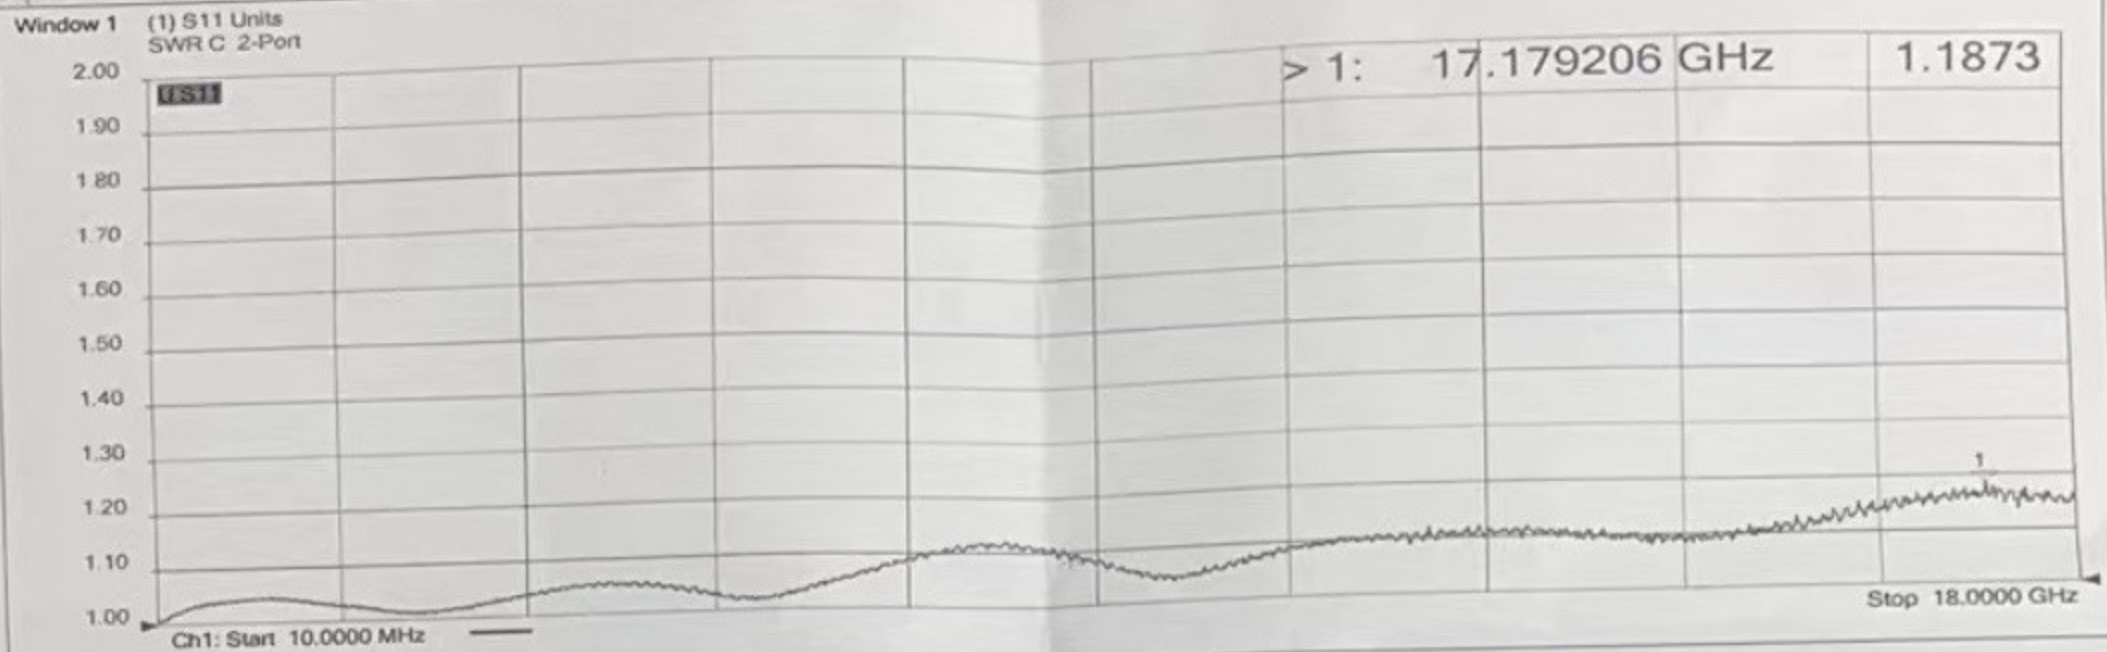


Notes:

- Frequency range: DC – 18 GHz
- VSWR < 1.20:1 from DC through 18 GHz
- Voltage rated through 500 volts
- Impedance = 50 OHMS
- Operating temp: -55°C to 165 °C
- Mating cycles = 250 min. in proper usage
- Inner conductor: Gold plated beryllium copper
- Outer conductor: Passivated stainless steel
- Dielectric: PEI / PTFE

All DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED	SIZE A	SCALE NO	
	REV. A	SHEET 1/1	
CAGE CODE: 4KGK3	ePCN-A2418		Title: SMA Female to SMP Male, 18 GHz Adapter

Contact us:
E-mail: sales@evissap.com



Channel Settings

Channel	Sweep Type	Points	Start (MHz)	Stop (GHz)	IF BW (kHz)	Sweep Time (s)	Pow 1 (dBm)	Pow 2 (dBm)
1	LinFreq	1601	10.000000	18.000000	50.000000	1.000000	-5.000000	-5.000000